


**GUJARAT TECHNOLOGICAL UNIVERSITY**  
**BE – SEMESTER – VIII EXAMINATION – WINTER 2016**


**Subject Code: 180205****Date: 22/10/2016****Subject Name: Automotive CAD ( Department Elective-II)****Time: 02:30 PM to 05:00 PM****Total Marks: 70****Instructions:**

1. Attempt all questions.
2. Make suitable assumptions wherever necessary.
3. Figures to the right indicate full marks.


- Q.1** (a) Explain the following graphic display techniques : **07**  
 (i) Raster scan display (ii) Vector display (iii) Direct view storage tube .
- (b) Discuss different steps of CAD process in engineering. **07**
- Q.2** (a) List down different hardwares used in CAD system. Explain each briefly with suitable sketches. **07**
- (b) Prepare a flow chart for line drawing using DDA algorithm. **07**
- OR**
- (b) An axial stepped bar is shown in figure-1. It is subjected to an axial pull of 5 KN. **07**  
 If the material of bar is uniform and has modulus of elasticity as 200 GPa. Find displacement of each element by using elimination approach method. All dimensions are in mm.
- Q.3** (a) State advantages, limitations and applications of finite element method. **07**
- (b) Explain Newton Raphson method to find roots of equations. **07**
- OR**
- Q.3** (a) Solve the following simultaneous equations by Gauss elimination method. **07**  
 $X_1 - 3X_2 + 4X_3 = 2$ ;  $2X_1 + 3X_2 + X_3 = 3$ ;  $-X_1 + 2X_2 + 3X_3 = 5$ .
- (b) Explain different steps involved in FEM to design the automotive components. **07**
- Q.4** (a) Determine the displacements of nodes and elemental stresses for the bar as shown in figure 2. **07**  
 Take:  $A_1 = 400 \text{ mm}^2$ ,  $A_2 = 500 \text{ mm}^2$ ,  $l_1 = l_2 = 200 \text{ mm}$ ,  $l_3 = 250 \text{ mm}$ ,  $P_1 = P_2 = 10 \text{ kN}$  and  $E = 200 \text{ GPa}$ .
- (b) Write a short note on the following: **07**  
 (i) Homogeneous coordinates in transformations.  
 (ii) Concatenation of transformations.
- OR**
- Q.4** (a) A triangle ABC with vertices A(30,20), B(90,20), and C(30,80) is to be scaled by a factor of 0.5 about a point X(50,40). Determine the new coordinates of the vertices for a scaled triangle. **07**
- (b) Explain different types of modeling with suitable sketches. **07**
- Q.5** (a) Consider a cluster of four springs as shown in figure 3. Calculate deflections of each spring when a force of 2000N is applied. Model the spring as 1D spar elements. **07**
- (b) The three vertices of triangle PQR are: P(50,20), Q(110,20), and R(80,60). Determine the coordinates of the vertices for the new reflected triangle, if it is to be reflected about: (i) X-axis ; and (ii) line  $y=x$ . **07**
- OR**
- Q.5** (a) Write a short note on B-Spline curves. **07**
- (b) With suitable sketches, explain different types of co-ordinate systems required for geometric display systems. **07**

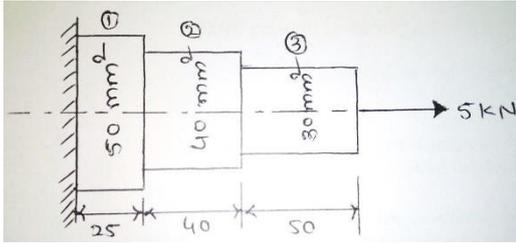

**Figure: 1**

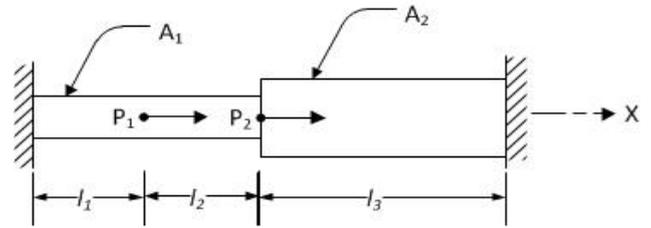

**Figure: 2**

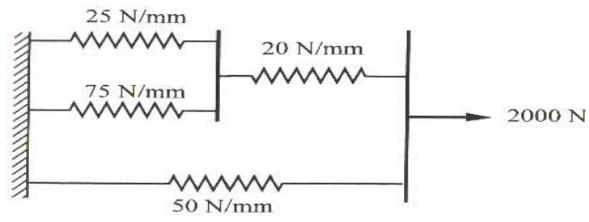

**Figure: 3**

\*\*\*\*\*